

## Multi bag filter housing MBF 8-14

Amafilter® multi bag filters are suitable for a variety of applications and are a simple, easy to use, cost effective choice. Amafilter® supply a wide range of filter bags and bag filter housings.

Amafilter® multi bag filters are available for 3 to 6 bags. These bag filters are excellent for use in the filtration of liquids containing higher concentrations of coarse solids. They are particularly beneficial when handling batches of (various) liquids. They are ideally suited for end filtration or polishing of liquids with extremely low concentrations of solids.

#### **Features**

- Easy to use, good interior sealing and accessibility
- Suitable to filtrate hazardous and non-hazardous liquid media as per PED 2014/68/EU directive
- Strong stainless steel support basket for low flow resistance and maximum utilisation of entire surface area
- Slightly conical support basket for easy filter bag removal
- Perfect sealing between unfiltered liquid and filtered liquid is achieved by a bag retainer. The filter bag seals with a feltcovered Snap-Collar ring or plastic seal which tightly fits into the support basket
- Liquid displacement cover: no liquid runs over the side
  when opening the filter
- Liquid displacer units are available to reduce the liquid volume inside the filter bags

### **Filter Bags**

Amafilter® supplies a wide range of filter bags in different materials, pore sizes, dimensions and models to fit in our range of bag filter housings as well as those of other manufacturers.



# A www.amafiltration.com



# Multi bag filter housing



#### **Typical application**


Filtration of (non-) hazardous liquids


### **Standard Specification**

- Design: ASME
- According: PED 2014/68/EU
- Design pressure: -1 / 6 bar(g)
- Design temperature: -10 / 150°C
- Recommended maximum pressure difference: 2.5 bar
- Operating temperature: depending on the filter media and gaskets used
- The filters are standard manufactured of stainless steel. Other materials on-request.
- Available for size 2 filter bags
- Suitable for 8 up to 14 filter bags
- Filtration area 4 up to 7 m<sup>2</sup>
- Mesh support baskets
- Spherical cover with a hydraulically operated davit for cover lifting
- Cover closure with eye bolts with handles
- Four brackets on models with 8-14 bags
- O-ring material: standard EPDM. Other materials on-request such as FPM/Viton® or silicone
- FDA compliant on-request

### Special models to meet your requirements

Other models suitable for higher temperatures, higher pressure, other material (Duplex, Monel) or size 1 are available on-request.



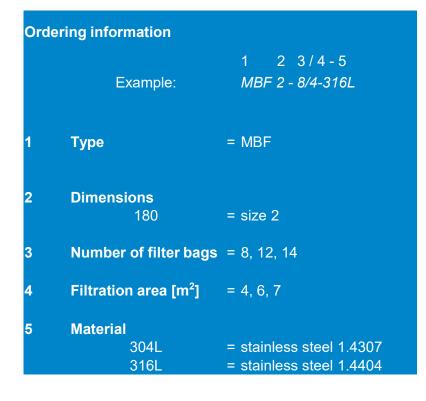

Model	A Ø [mm]	B Standout [mm]	C Width [mm]	D Height mm]	N1 / N2 Inlet / Outlet	N3 Pressure gauge	N4 Vent	Volume [dm³]	Empty weight [kg]
MBF 2-8/4	780	-	1180	1400	DN150/ PN16	DN50/ PN16	1"NPT	450	500
MBF 2-12/6	900	-	1300	1400	DN200/ PN16	DN50/ PN16	1"NPT	600	600
MBF 2-14/7	1100	-	1500	1400	DN250/ PN16	DN50/ PN16	1"NPT	900	800

11/01/2024



Tel : +31 573 297 777 info.fgnl@filtration.group www.amafiltration.com

© 2022 Filtration Group

All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, including photocopying, recording, or other electronic or mechanical methods, without the prior written ermission of the publisher, except in the case of brief quotations embodied in critical reviews and certain other noncommercial uses permitted by copyright law.