

Cricketfilter® Cloth Clamp

Quick Release Tilt House Clamp

Amafilter® has developed a range of filter cloth clamps specifically engineered for the Cricketfilter® automated system elements, providing fast, secure and reliable clamping while reducing maintenance time and operating costs.

KEY BENEFITS

- **Quick Release design**
No unscrewing required, resulting in faster installation and changeovers while reducing cloth replacement time.
- **Reusable construction**
Durable, reusable design engineered for multiple service cycles, enabling faster maintenance, lower OPEX, and reduced waste.
- **Integrated safety lock**
Prevents the clamp housing from opening after assembly, enhancing process reliability and operational safety.
- **Multi-drive screw design**
Compatible with hex sockets, Phillips screwdrivers, and flat-blade screwdrivers, providing maximum installation flexibility and ease of maintenance.
- **Universal fit**
One clamp design compatible with all Cricketfilter® cloths, with clamping bands specially cut to length for both element types, simplifying inventory management and reducing spare parts requirements.

STANDARD / NORM
DIN 3017-1

SPECIFICATIONS


Material: SS304

Width: 9mm

RECOMMENDATIONS AND NOTES

Recommended installation torque is 3.5Nm (31 lb-in).


Damage to clamp and / or mating components may occur if tightened above max recommended installation torque

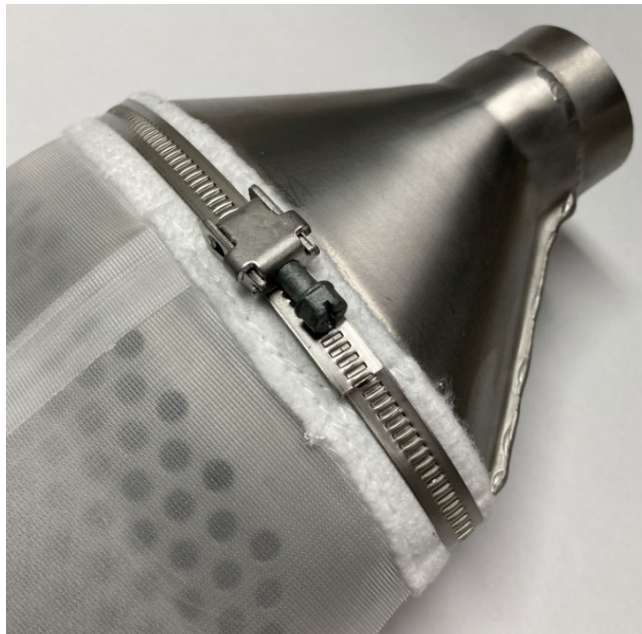

ORDERING INFORMATION

Filter Type	Ordering Code	Material
Cricket Element Type I	72520382	SS304
Cricket Element Type II	72520381	SS304

All clamps are shipped disengaged and band being in flat condition.

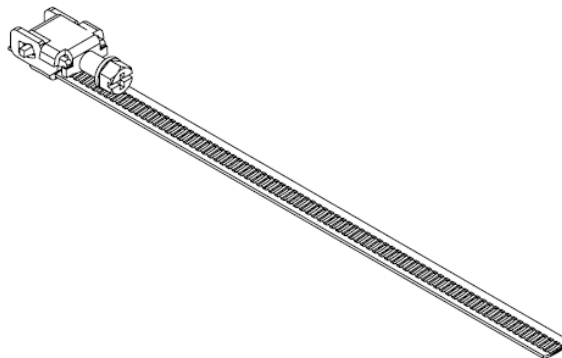

0408202

